

# Expandable 400-Zone Control Panel



The Scantronic 400WE is selectable as a Grade 2 or Grade 3 control panel with 10 FSL zones, expandable up to 400 zones, making it ideal for large commercial properties. Built with cyber security in its DNA, the 400WE is SecureConnect™ Cloud and App enabled.

### **Decimal expansion system**

It provides 25% more zones per expander than traditional 8 zone expanders. Expanders have 10 zones in addition to the 10 zones on the end station. This makes it easy to locate zones and reduces the total number of expanders required. A 30 zone radio expander is also available.

### **Performance bus**

4 buses with flexibus to provide maximum installation flexibility. Connect expanders and keypads to any bus and address them as though there was only a single bus.

### **Semi-auto addressing**

Prevents address duplication for bus mounted devices, saving hours of installation diagnostic time.

### **Audible bus device tracing**

Locate any bus device quickly and easily. Reduce the time taken to complete maintenance and service calls.

### **At a glance...**

- Ten FSL zones expandable to 400
- 400 user codes
- SecureConnect™ enabled
- App for end user control and notification
- Can accommodate up to two 17 Ah batteries which are independently charged & monitored
- Four outputs (two clean contact relay, two transistorised)
- Includes keypad with zones and proximity reader
- 16 communication outputs
- Built-in ethernet port, and optional Wi-Fi and 4G




*Powering Business Worldwide*

# Scantronic product data sheet

## Product specification

Product code	PAN-400WE-KPZ
Compliance	EN50131 PD6662:2017 Grade 2 or 3
Zones on board	10
Total zone capacity	400
Total number of buses	4 (with Flexibus)
Number of users	400
Number of outputs	400 plus 16 communicator
Maximum number of partitions	50
Number of part sets per partition	3
Power supply	3A
Battery (maximum capacity)	2 * 17Ah
Temperature range	Environmental class 2; -10°C to 55°C 93% RH
Weight	6Kg panel without battery
Remote communications	Ethernet included. Choice of plug on communicators for PSTN, GSM or 4G
Communications security	SSL/TLS - when communicating with SecureConnect™ App or Cloud
Dimensions	427mm (h) x 402mm (w) x 102mm (d).

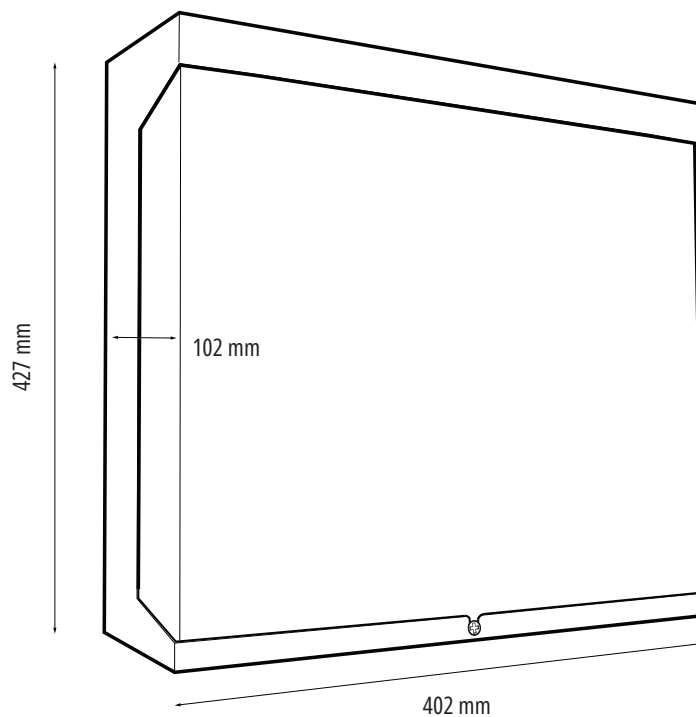

**Eaton**  
Electrical Sector  
EMEA Route de la Longeraie 7  
1110 Morges, Switzerland

**Eaton Electrical Products Ltd**  
Llantarnam Park,  
Cwmbran, NP44 3AW  
Tel: +44 (0)1302 303 99

Tel: +44 (0)1594 545 400  
Email: [securitysales@eaton.com](mailto:securitysales@eaton.com)  
Web: [www.myscantronic.com](http://www.myscantronic.com)

Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.